

B300-ODL

HOLIDAY AT HOME








Technische informatie
Technical information
Informations techniques
Technische Daten



OUTDOOR LIVING by
BRUSTOR® 



www.brustor.com
NL FR EN DU V2017.00

Doorsnedes Cross-sections Sections

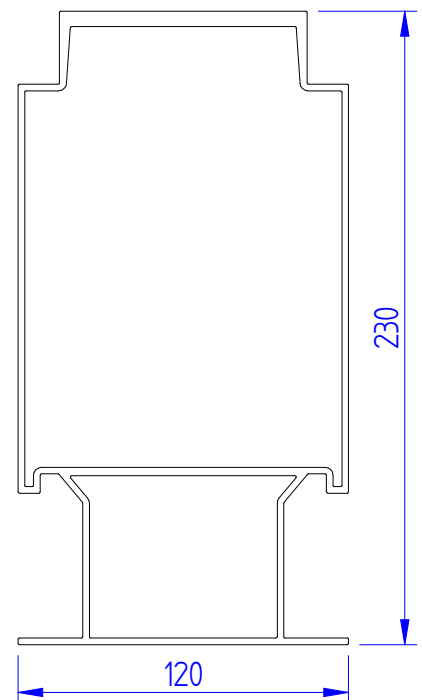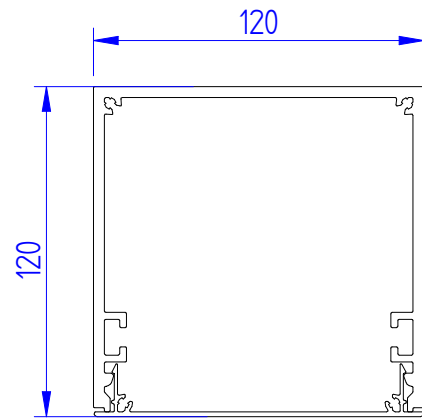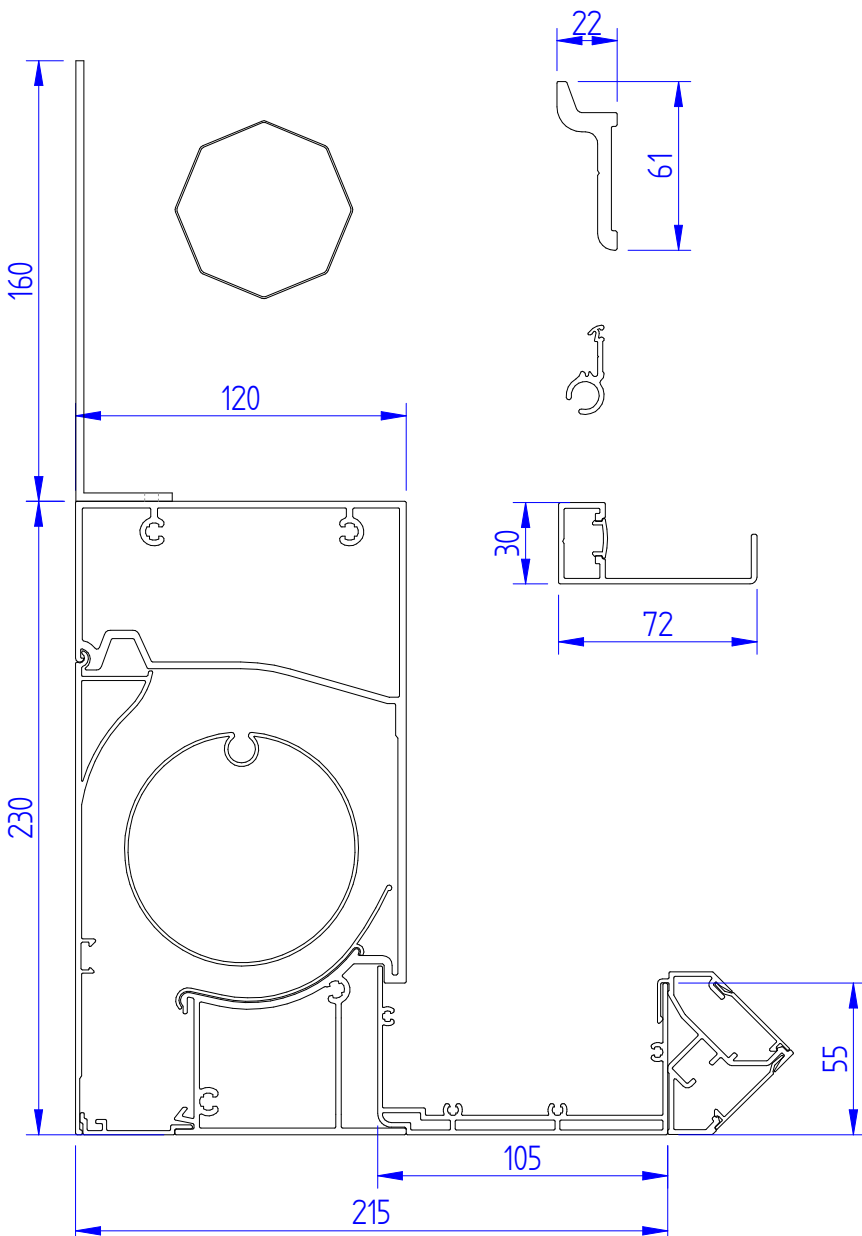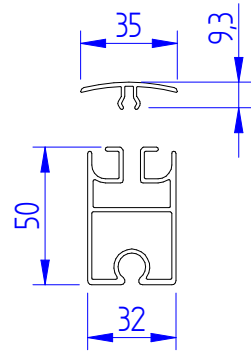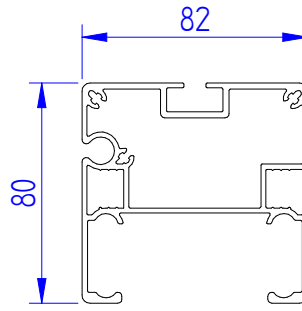
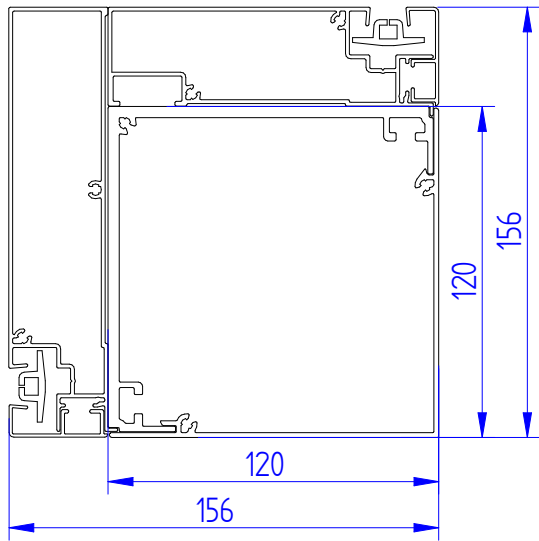


Grondbevestiging
groundfixation
Fixation au sol



Pole support (std)
 Support de poteau (std)
 Pfostenstutz (std)

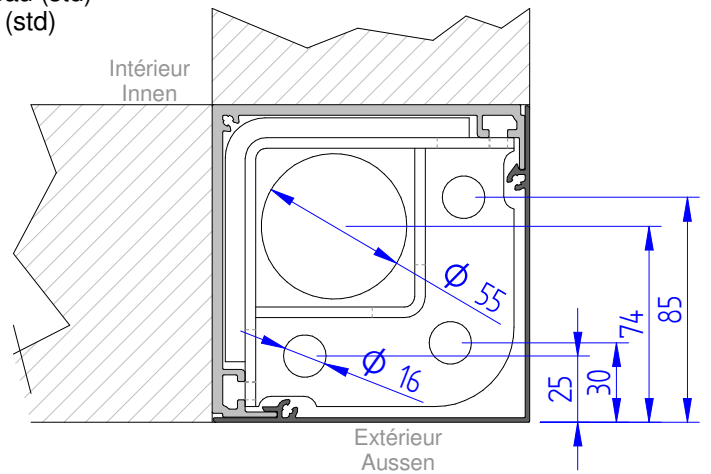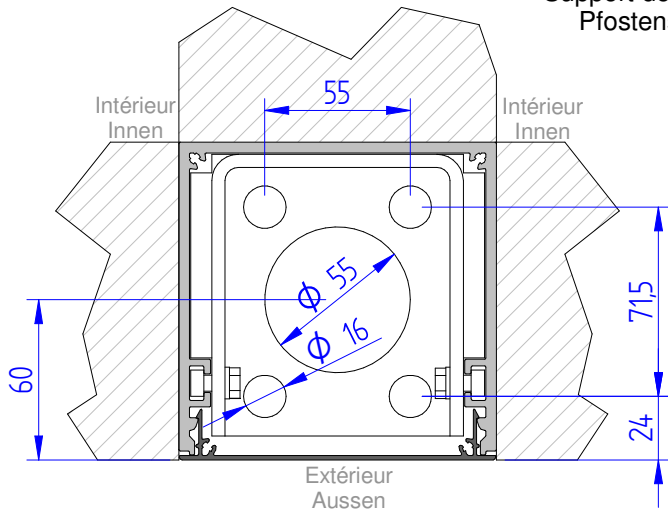


Grondanker
 Ground anchor
 Pied fixe à enterrer
 Grundanker

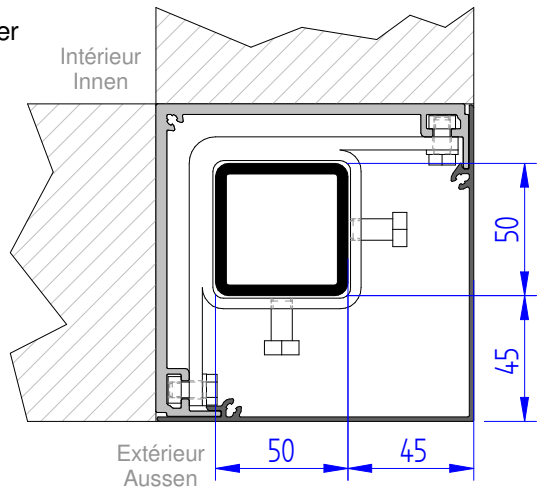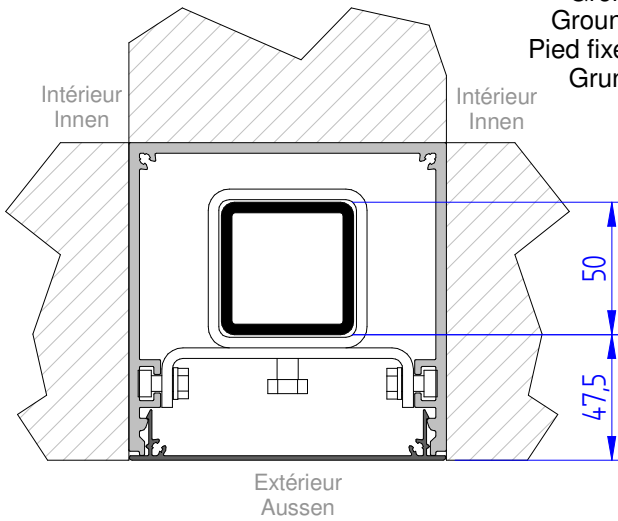









Vloerplaat 20x20cm
 Floorplate 20x20cm
 Plaque de sol 20x20cm
 Bodenplatte 20x20cm

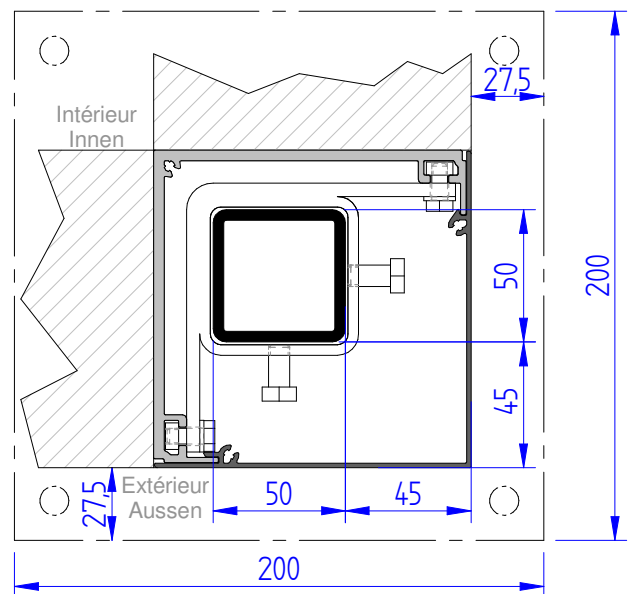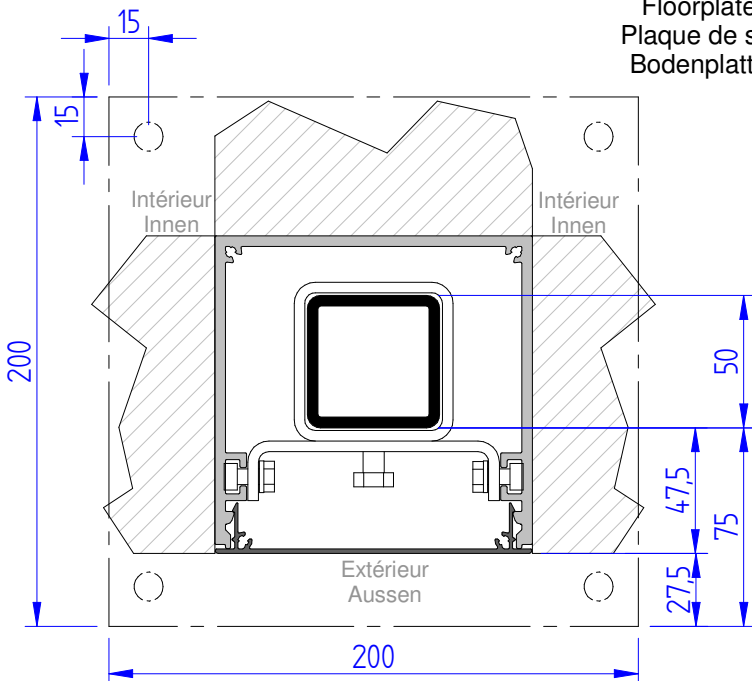



Muurbevestiging
Wall fixation
Fixation murale

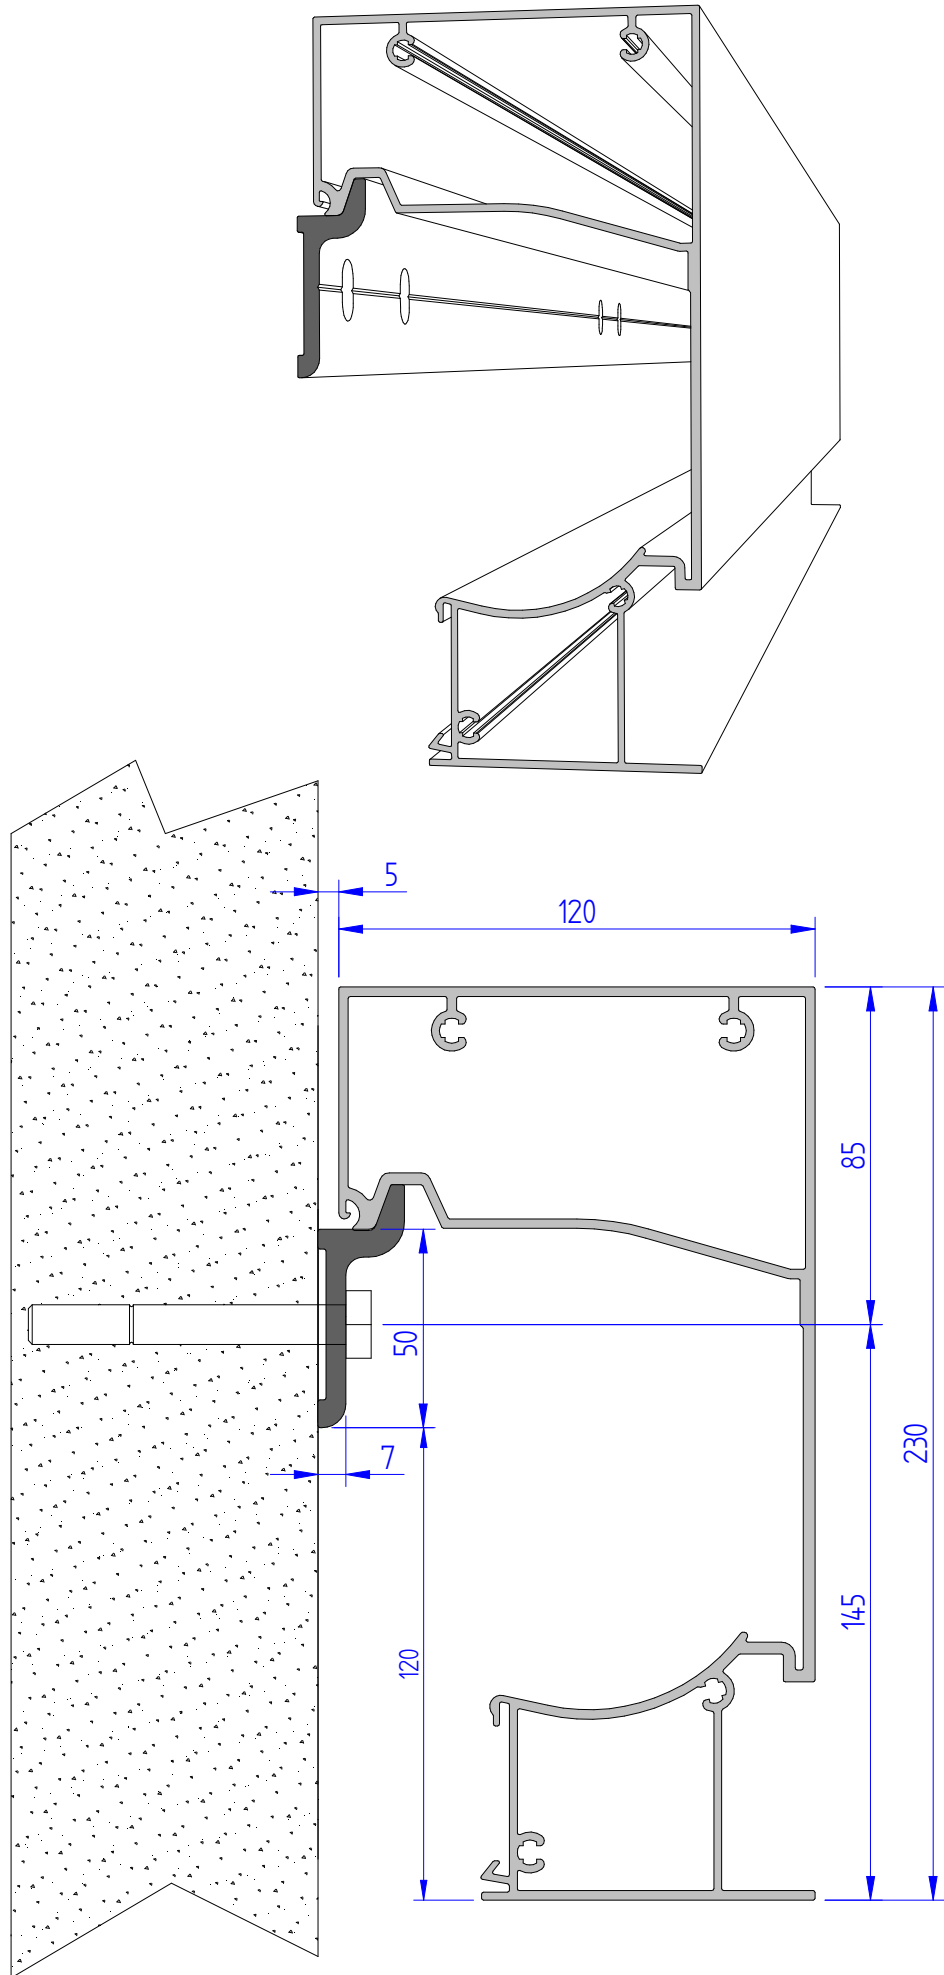

Hoekstukken
Corner pieces
Pièces cornières

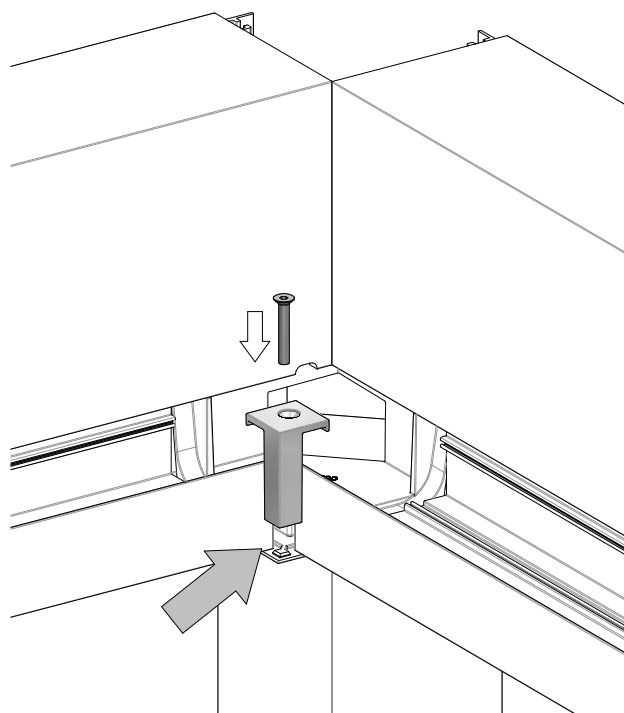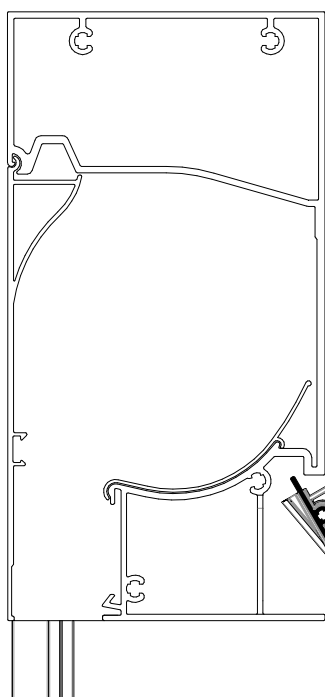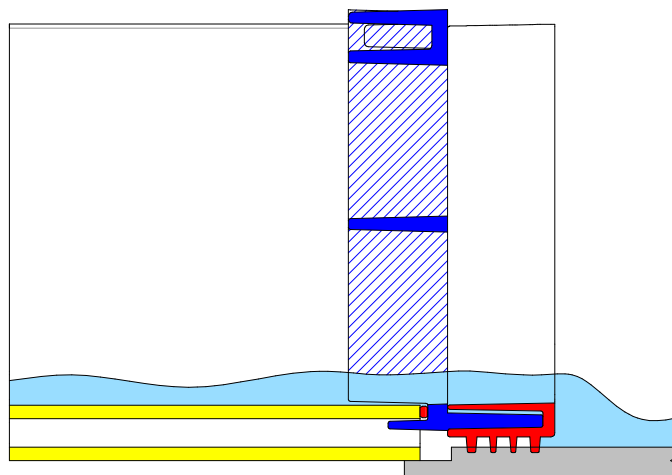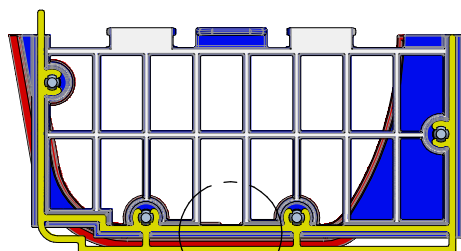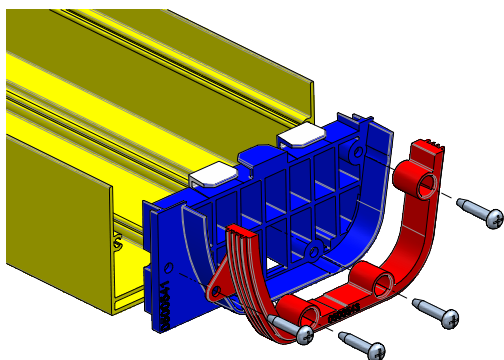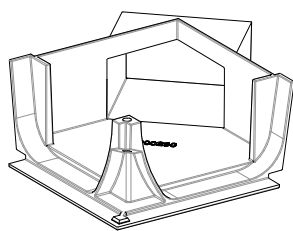

Installatiehoogte +160MM
Installation height +160MM
Hauteur d'installation +160MM

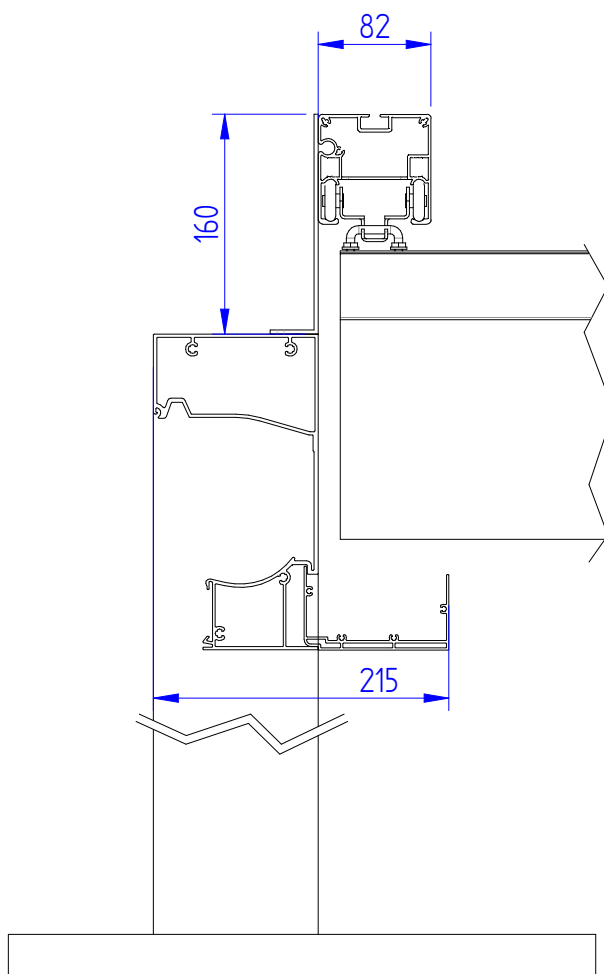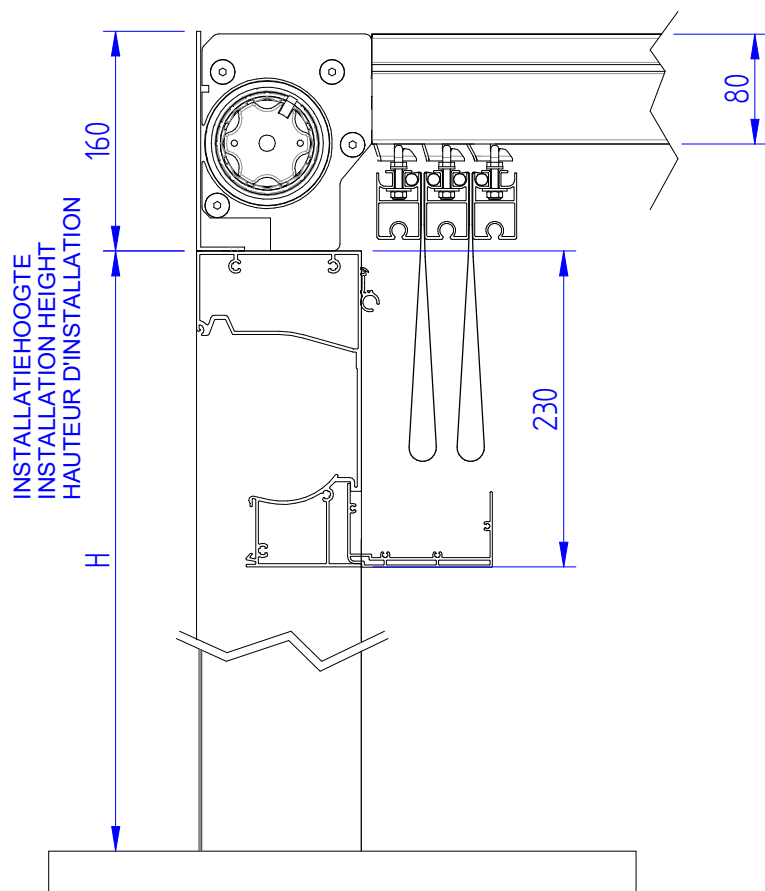


Gewicht (kg)
Weight (kg)
Poids (kg)

L	OL-B300 4 palen, 1 gemotoriseerd dakelement en 2 gijlarmen OL-B300 4 posts, 1 motorised roof element and 2 arm profiles OL-B300 4 poteaux, 1 élément de toit motorisé et 2 profils bras																							
	2400	2600	2800	3000	3200	3400	3600	3800	4000	4200	4400	4600	4800	5000	5200	5400	5600	5800	6000	6200	6400	6600	6800	7000
1800	240	240	250	260	270	280	280	280	290	300	310	320	330	330	340	350	350	360	370	370	380	390	390	400
2000	240	250	260	270	280	290	290	290	300	310	320	330	330	340	350	350	360	370	380	390	390	400	400	410
2200	250	260	270	280	290	290	290	300	310	320	330	330	340	350	360	370	380	390	400	400	410	420	420	430
2400	260	270	280	290	290	300	300	310	320	330	340	350	360	360	370	380	390	400	410	410	420	420	430	440
2600	270	280	290	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	440	450	450	460	470
2800	280	290	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	460	470	480	490
3000	280	290	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500
3200	290	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510
3400	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520
3600	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530
3800	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540

L	OL-B300 4 palen, 2 gemotoriseerde dakelementen en 4 gijlarmen OL-B300 4 posts, 2 motorised roof elements and 4 arm profiles OL-B300 4 poteaux, 2 éléments de toit motorisés et 4 profils bras																							
	2400	2600	2800	3000	3200	3400	3600	3800	4000	4200	4400	4600	4800	5000	5200	5400	5600	5800	6000	6200	6400	6600	6800	7000
4000	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550
4200	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560
4400	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560
4600	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570
4800	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580
5000	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580
5200	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
5400	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600
5600	370	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600
5800	380	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610
6000	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620
6200	390	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620
6400	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630
6600	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630	640
6800	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630	640
7000	420	430	440	450	460	470	480	490	500	520	530	540	550	560	570	580	590	600	610	620	630	640	650	660


Screen = + 5kg/m

Openingsrichting van het dak
Opening direction of the roof
Sens d'ouverture du toit

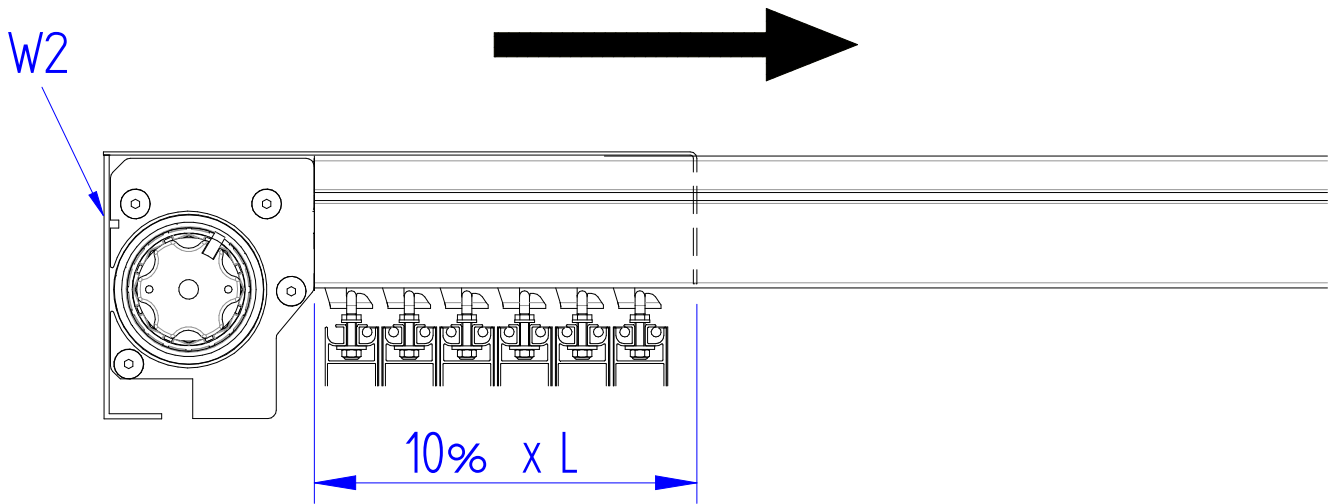


Richting helling dak
Pente de la toile
Roof slope
Richtung Dachneigung


2 ARMS
2 BRAS

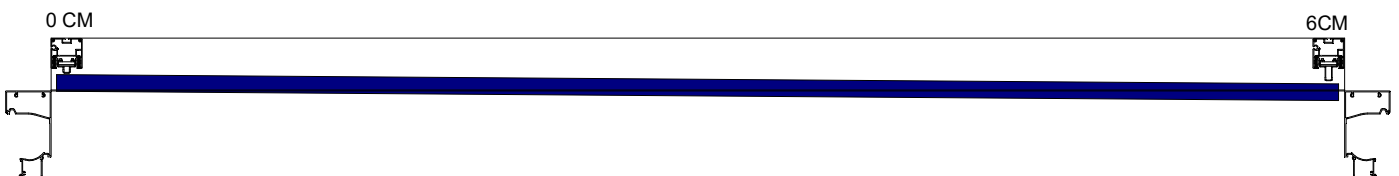


3 ARMS
3 BRAS

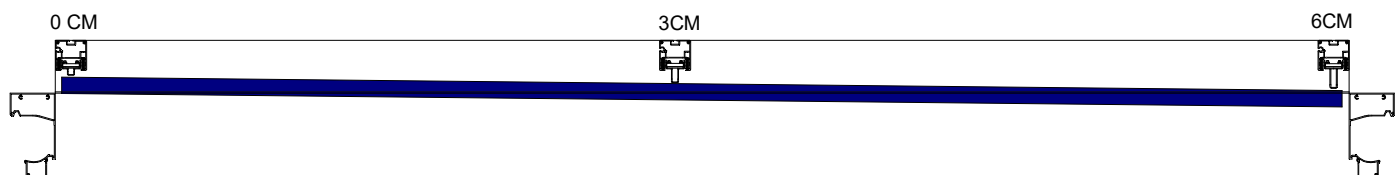

Domoticasysteem
Home automation system
Système domotique

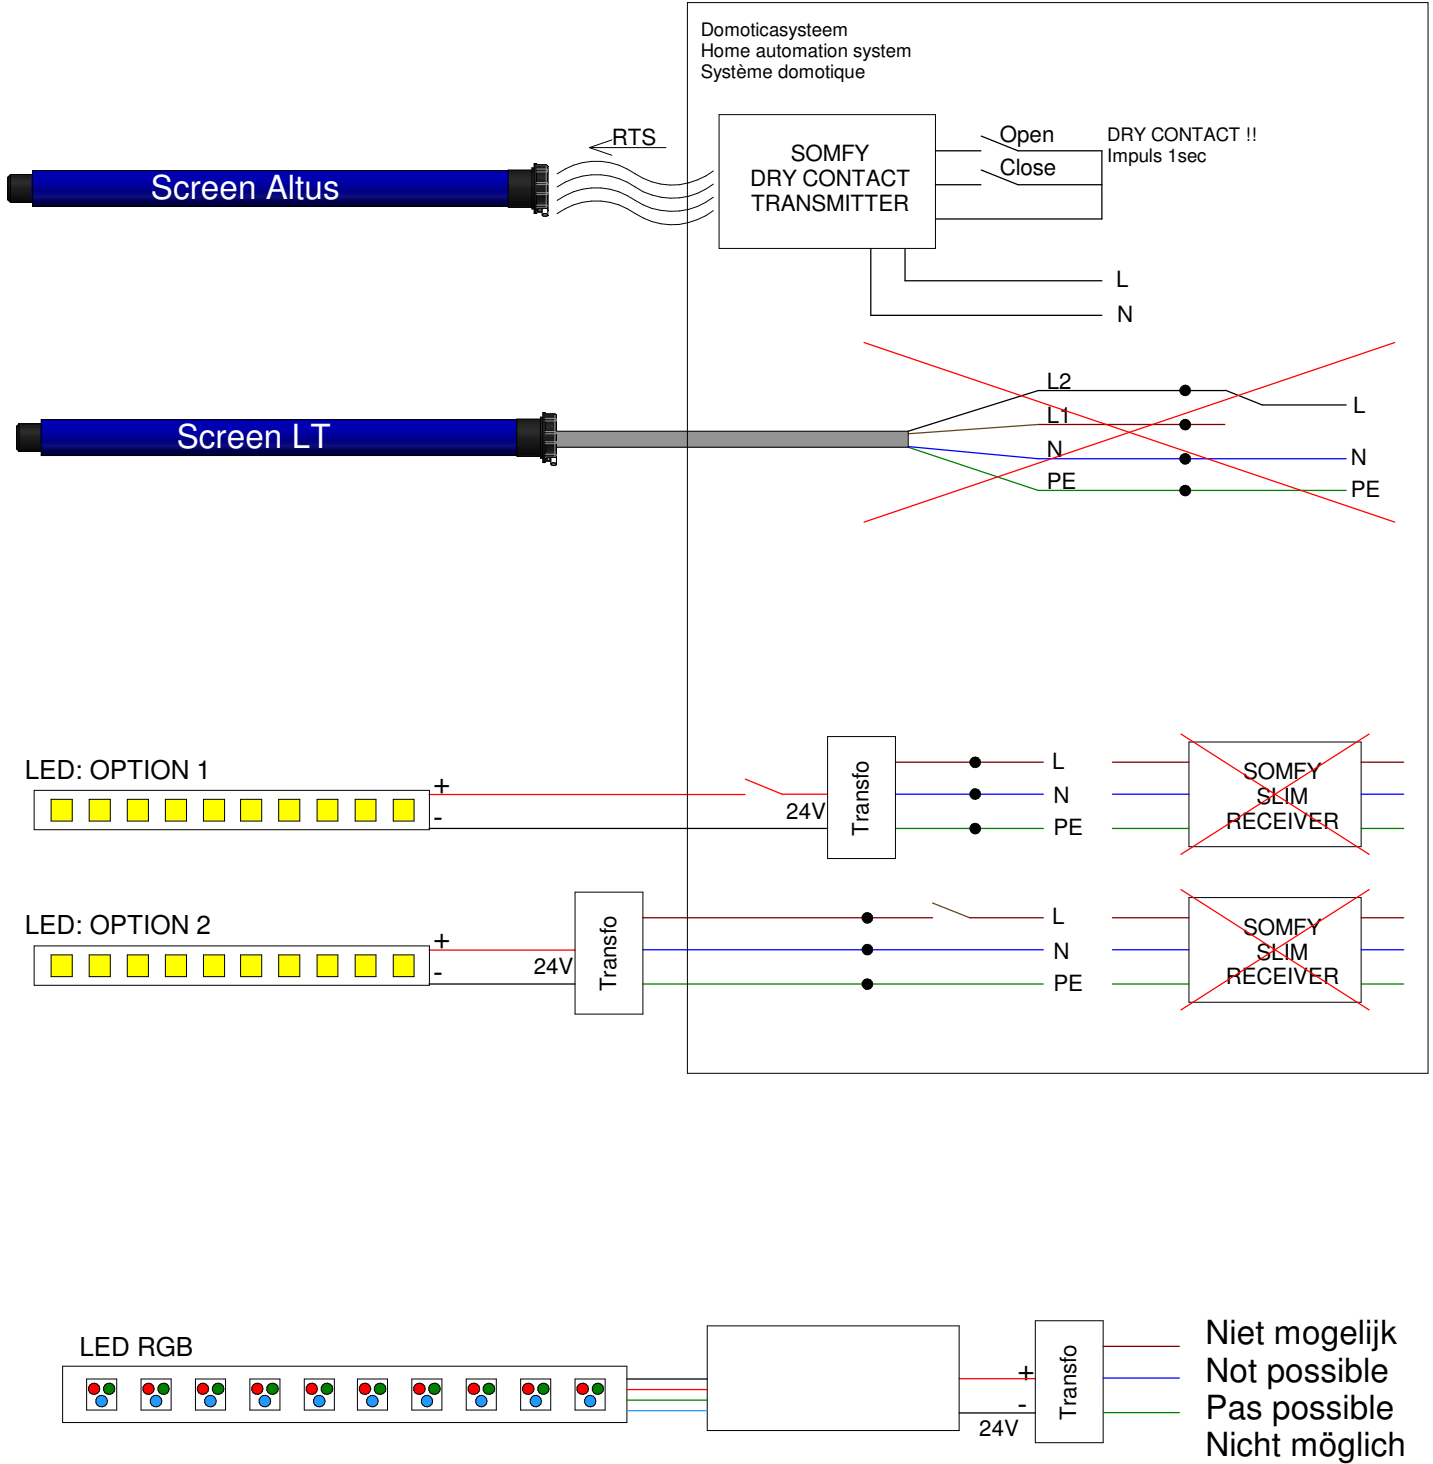

Technische specificaties
Technical specs
Spécifications techniques




- Screen
- 250 Watt
 - 240 V-AC
 - 15 Nm
 - 17 rot/min
 - IP44
 - 10m (kabel/cable/câble)




- LED (wit)
LED (white)
LED (blanc)
- 5 Watt/m
 - 24V-DC
 - 3500 K
 - 330 l/m
 - 10m (kabel/cable/câble)



- LED (RGB)
- 8 Watt/m
 - 24 V-DC
 - 10m (kabel/cable/câble)

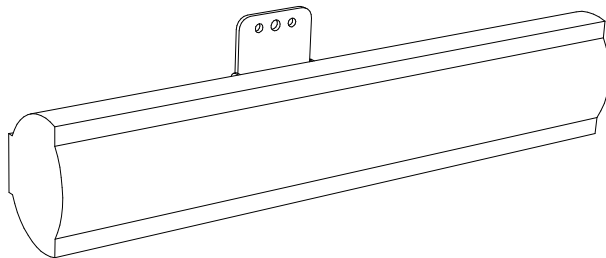


- Verwarming
Heater
Chauffage
- 2000 Watt
 - 240 V-AC
 - IP65
 - 3m (kabel/cable/câble)





- LED-SPOT
- 4,5 Watt
 - 24 V-DC
 - 3000K
 - 380lm
 - 10m (kabel/cable/câble/Kabel)
 - IP54
 - D52 x 28mm

Verbeter de spanning van de LED-cover
Improve the tension of the LED-cover
Améliorer l'accrochement du LED-cover


1

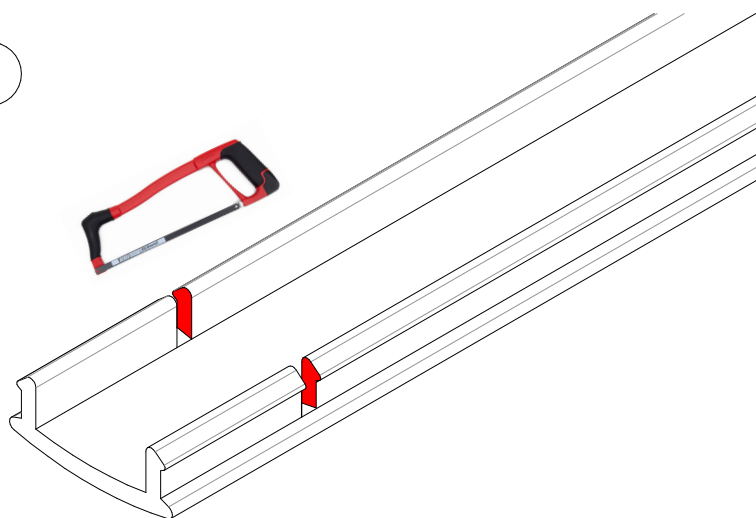


2

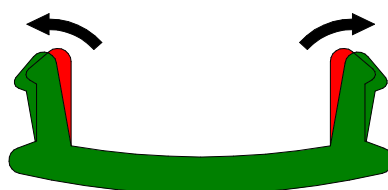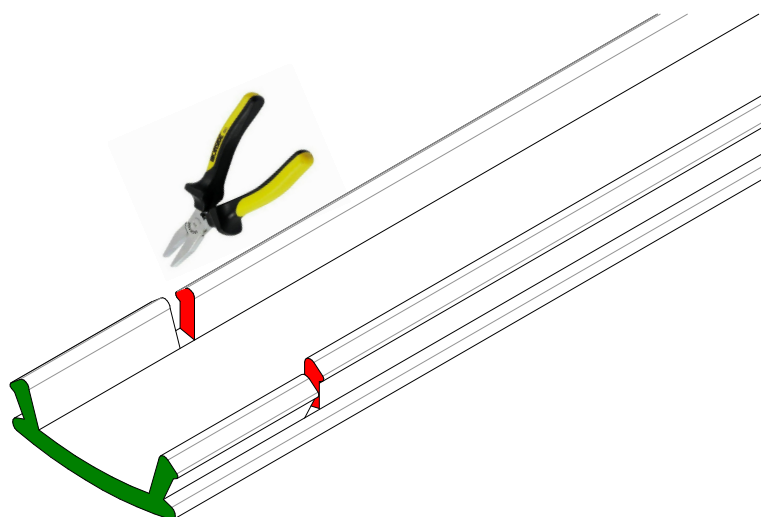




Frame only



1900939

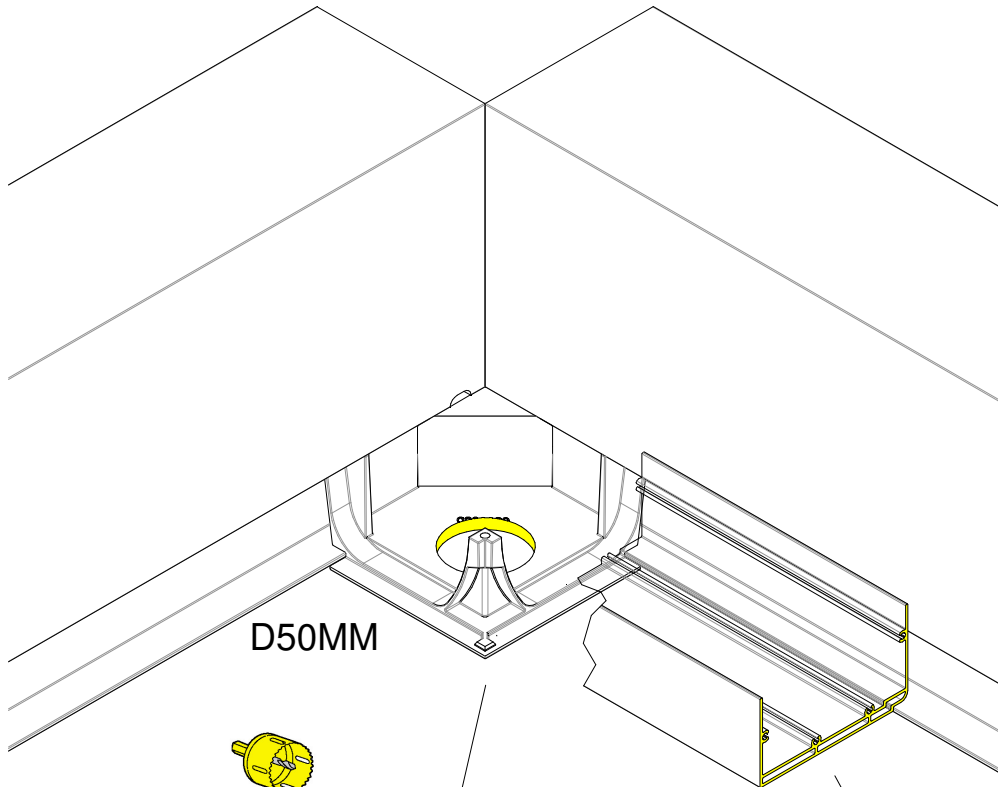


D50MM

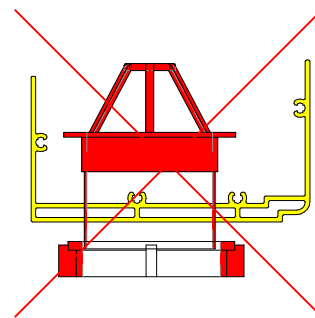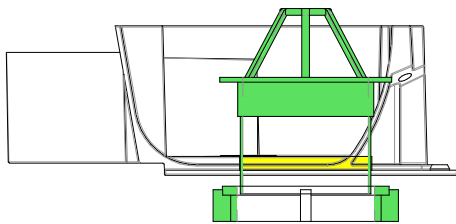


PVC
D50

Positie doekrolsteunen
Position supports de tube d'enroulement
Position rollertubesupports



Screen/PVC zonder venster
Screen/PVC without window
Screen/PVC sans fenêtre

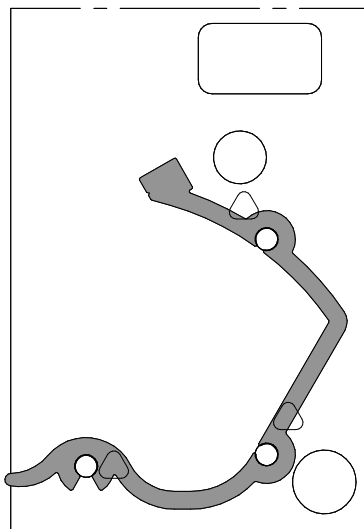


Screen/PVC met venster
Screen/PVC with window
Screen/PVC avec fenêtre

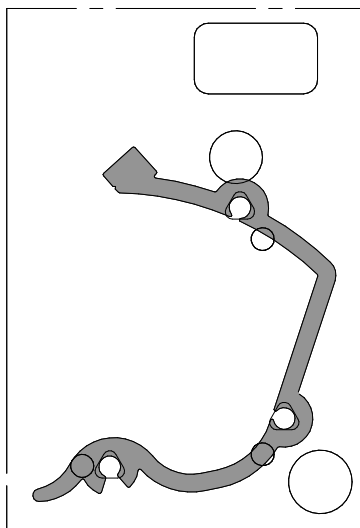


"Lock Cover Mainhousing"

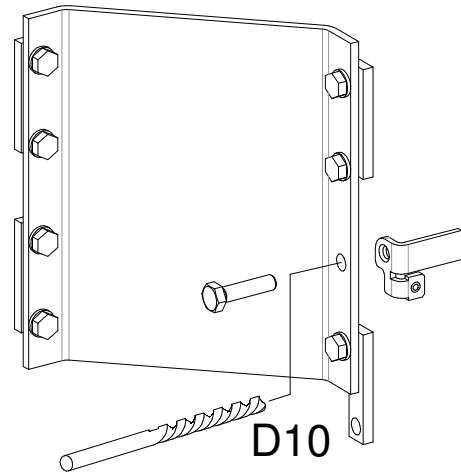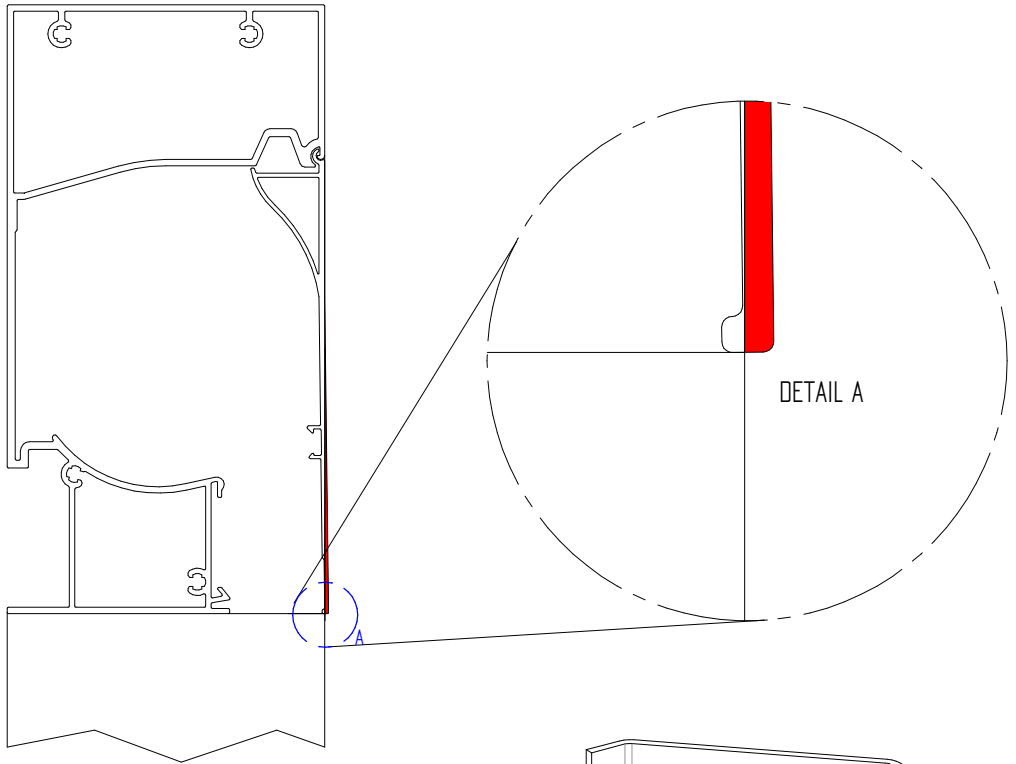


**Verwarming
Heater
Chauffage
Heizung**

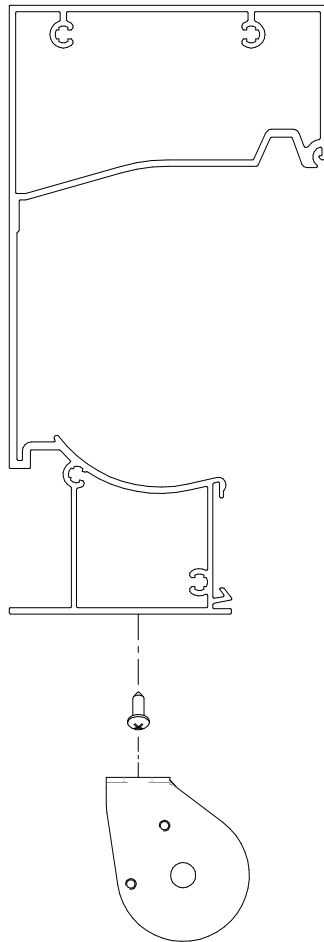






Ano + Zwart + Wit
Ano + Black + White
Ano + Noir + Blanc
Ano + Schwarz + Weiss

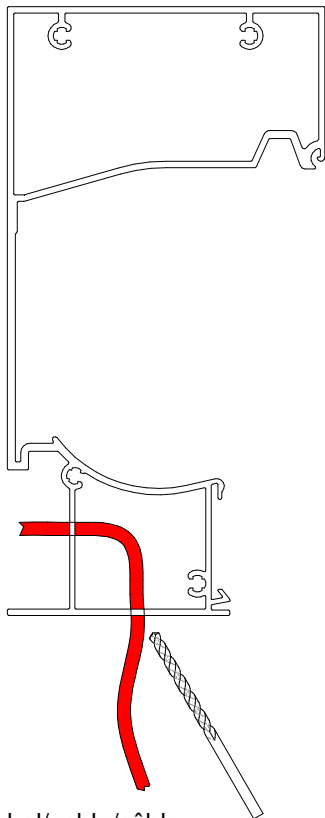



kabel/cable/câble

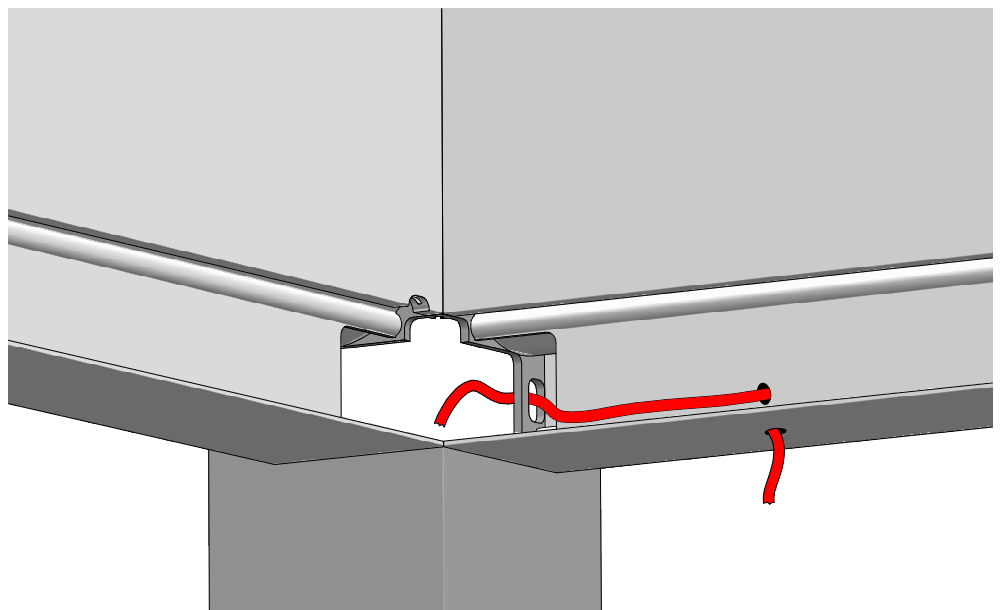






Grondbevestiging
Groundfixation
Fixation au sol
Grundbefestigung

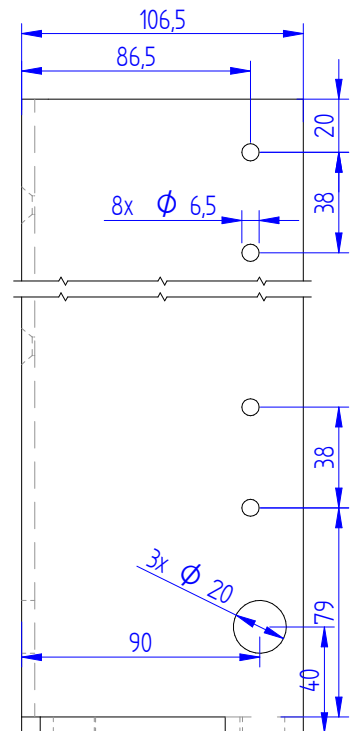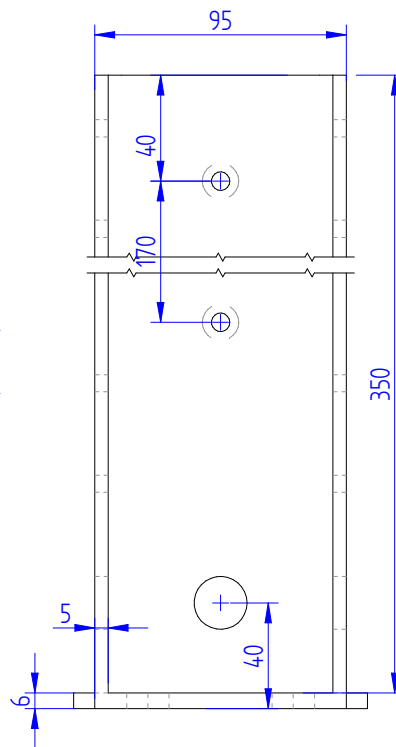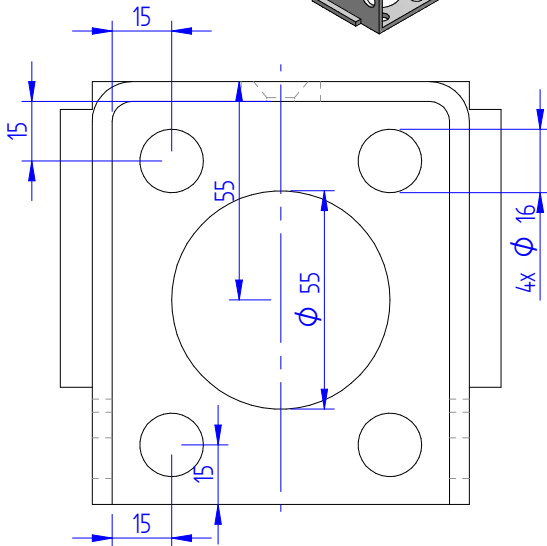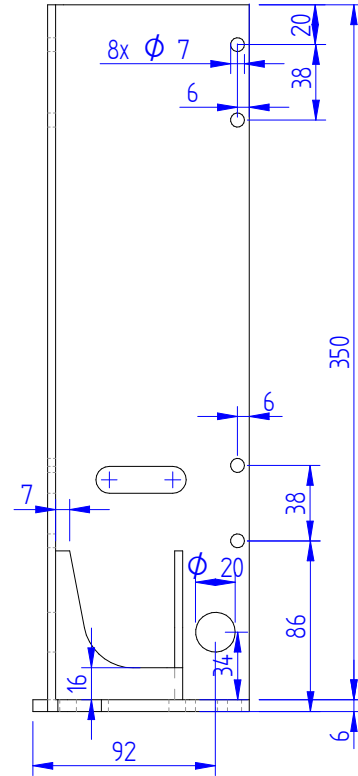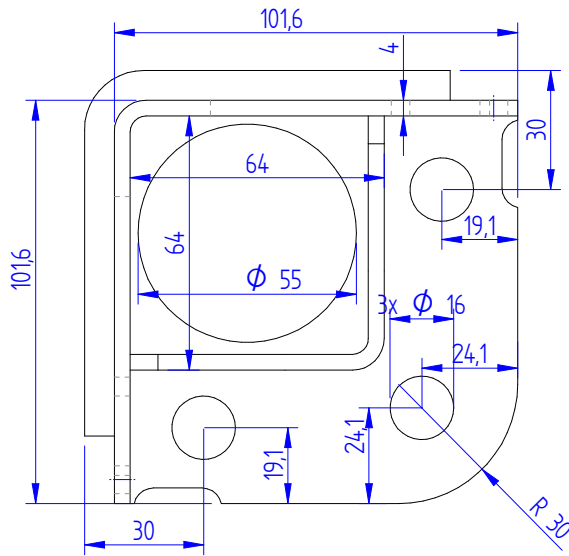

Grondbevestiging
Groundfixation
Fixation au sol
Grundbefestigung

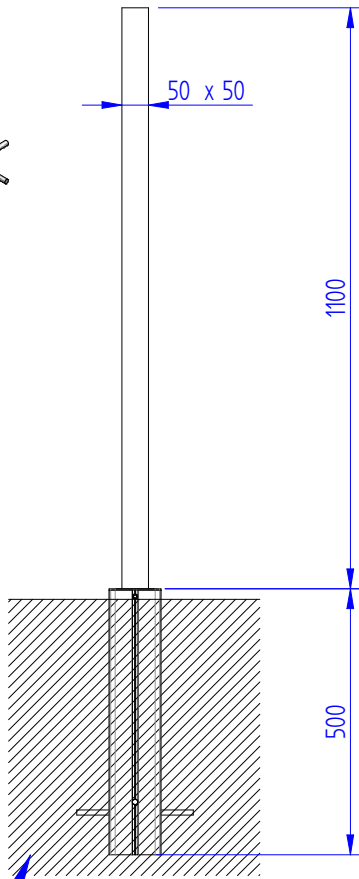

50cm x 50cm x 100cm

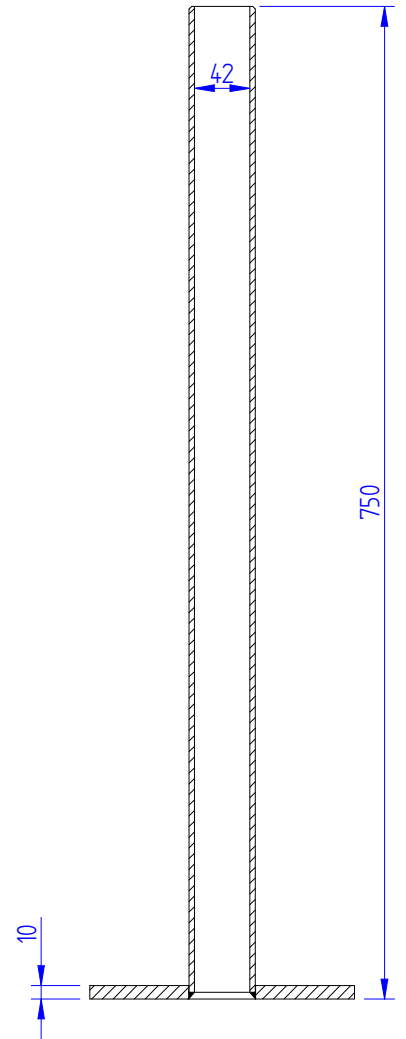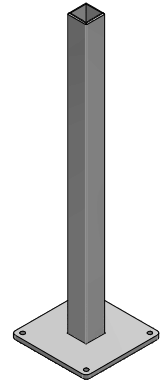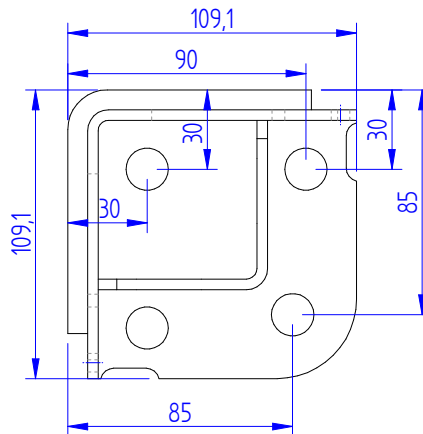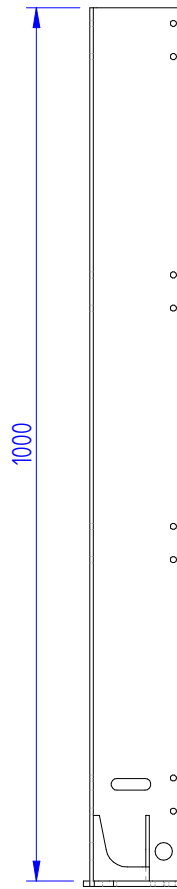

SECTION A-A

